




Light source test report:

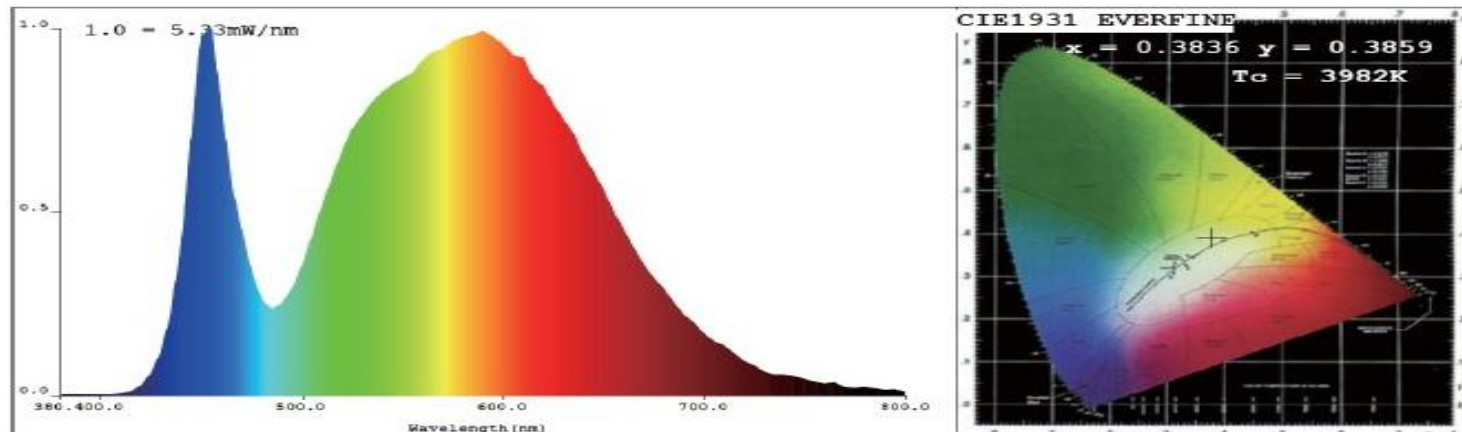

Feature:

SMD 2835 LED with high lumen output and high light efficiency (80lm/W)

Easy Installation, no RF, no flickering, environment friendly

Unique slim design, good appearance with spray white paint on shell

Power Supply: 110-240V AC



Application:

Home lighting Hotel



Hallway Shopping Mall

Rooms Office

Product code	Power (W)	CCT (K)	Luminous flux (lm)	CRI	Beam angle (°)	Dimension (mm)	Cut-out size (mm)
QL I-16A2CDC-5	5	3000/4000/6000	200/230/250 180/200/220	≥80 ≥90	110	∅85x22	∅75
QL I-16A2CDD-5	8	3000/4000/6000	400/430/460 360/390/420	≥80 ≥90	120	∅122x26	∅108
QL I-16A2CDF-5	12	3000/4000/6000	640/700/720 580/630/650	≥80 ≥90	110	∅172x26	∅160



Light source test report:

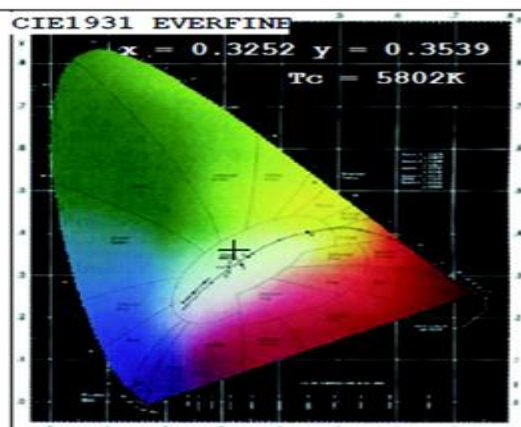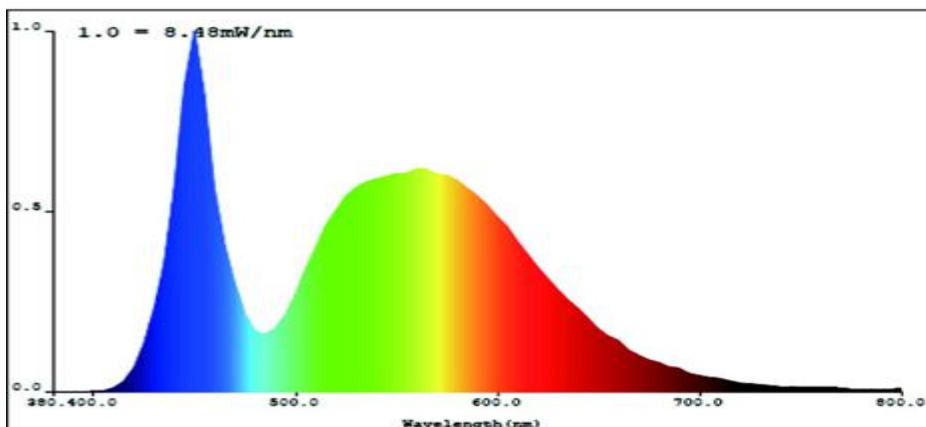

Feature:

SMD 2835 LED with high lumen output and high light efficiency (80lm/W)

Easy Installation, no RF, no flickering, environment friendly

Unique slim design, good appearance with spray white paint on shell

Power Supply: 110-240V AC



Application:

Home lighting Hotel



Hallway Shopping Mall

Rooms Office

Product code	Power (W)	CCT (K)	Luminous flux (lm)	CRI	Beam angle (°)	Dimension (mm)	Cut-out size (mm)
QL I-16A2CDF-5	15	3000/4000/6000	800/820/850 720/740/770	≥80 ≥90	120	∅172x26	∅160
QL I-16A2CDH-5	20	3000/4000/6000	1200/1250/1300 1080/1130/1170	≥80 ≥90	120	∅223x26	∅207
QL I-16A2CDJ-5	22	3000/4000/6000	1300/1350/1400 1170/1220/1260	≥80 ≥90	120	∅270x26	∅252



Light source test report:

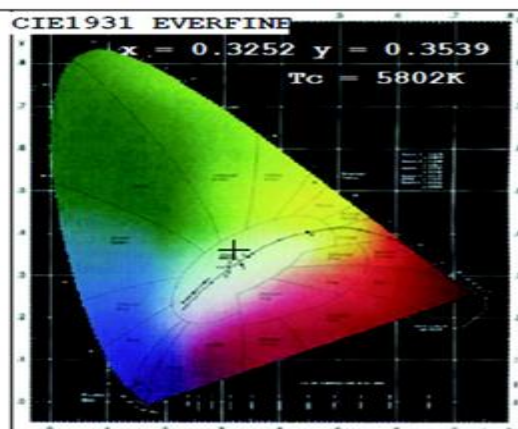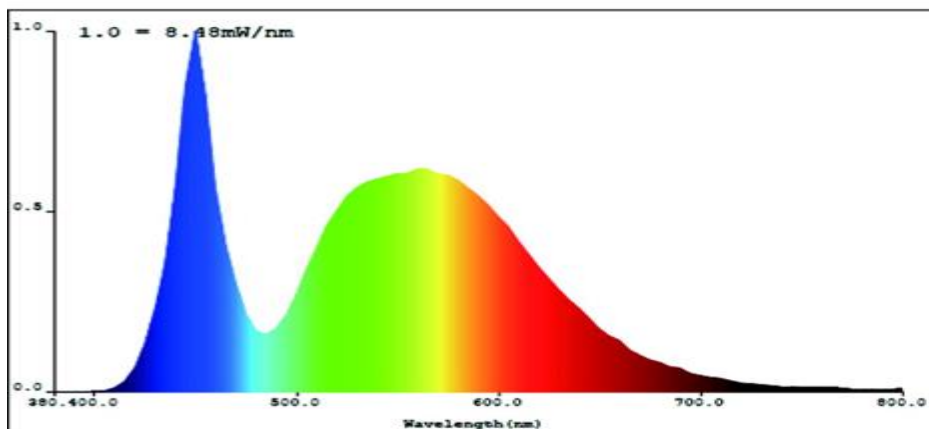

Feature:

SMD 2835 LED with high lumen output and high light efficiency (80lm/W)

Easy Installation, no RF, no flickering, environment friendly

Unique slim design, good appearance with spray white paint on shell

Power Supply: 110-240V AC



Application:

Home lighting Hotel



Hallway Shopping Mall

Rooms Office

Product code	Power (W)	CCT (K)	Luminous flux (lm)	CRI	Beam angle (°)	Dimension (mm)	Cut-out size (mm)
QL I-16A2GJC-5	5	3000/4000/6000	200/230/250 180/200/220	≥80 ≥90	120	85x85x22	75x75
QL I-16A2GJD-5	8	3000/4000/6000	400/430/460 360/390/420	≥80 ≥90	120	118x118x24	108x108
QL I-16A2GJF-5	12	3000/4000/6000	640/700/720 580/630/650	≥80 ≥90	120	172x172x24	160x160



Light source test report:

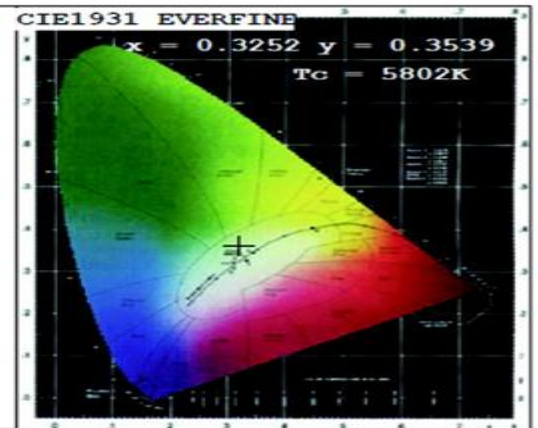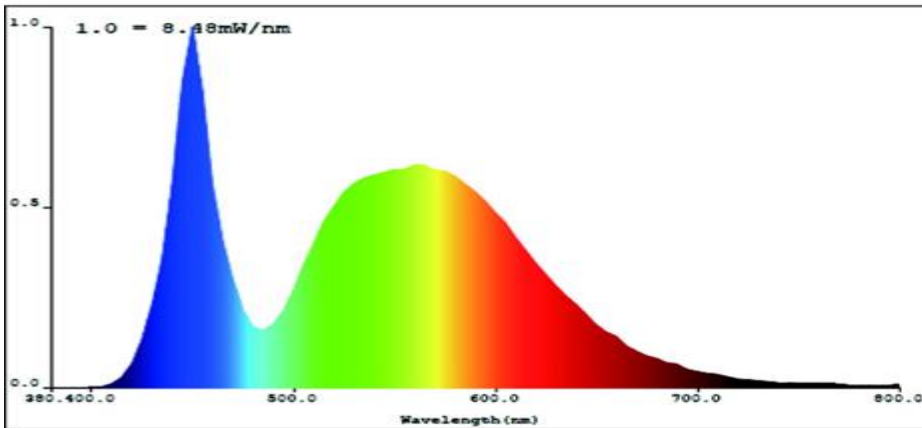

Feature:

SMD 2835 LED with high lumen output and high light efficiency (80lm/W)

Easy Installation, no RF, no flickering, environment friendly

Unique slim design, good appearance with spray white paint on shell

Power Supply: 110-240V AC



Application:

Home lighting Hotel


Hallway Shopping Mall

Rooms Office

Product code	Power (W)	CCT (K)	Luminous flux (lm)	CRI	Beam angle (°)	Dimension (mm)	Cut-out size (mm)
QL I-16A2GJF-5	15	3000/4000/6000	800/820/850 720/740/770	≥80 ≥90	120	172x172x24	160x160
QL I-16A2GJH-5	20	3000/4000/6000	1200/1250/1300 1080/1130/1170	≥80 ≥90	120	226x226x26	207x207
QL I-16A2GAJ-5	22	3000/4000/6000	1300/1350/1400 1170/1220/1260	≥80 ≥90	120	276x276x26	252x252



Light source test report:

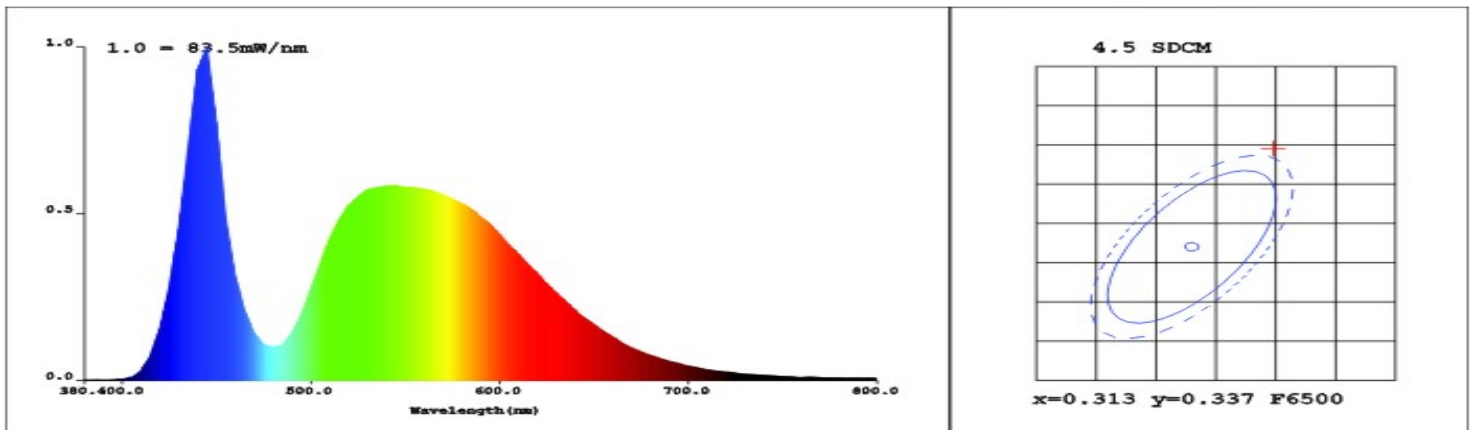

Feature:

SMD 2835 LED with high lumen output and high light efficiency (80lm/W)

Easy Installation, no RF, no flickering, environment friendly

Unique design, good appearance with spray white paint on shell

Power Supply: 110-240V AC



Application:

Home lighting Hotel


Hallway Shopping Mall

Rooms Office

Product code	Power (W)	CCT (K)	Luminous flux (lm)	CRI	Beam angle (°)	Dimension (mm)	Cut-out size (mm)
QL I-16A2IJD-13	9	3000/4000/6000	400/430/460 360/387/414	≥80 ≥90	120	120x120x36	NA
QL I-16A2IJF-13	13	3000/4000/6000	640/700/720 576/630/648	≥80 ≥90	120	170x170x36	NA
QL I-16A2IJH-13	17	3000/4000/6000	1000/1060/1100 900/945/990	≥80 ≥90	120	225x225x36	NA
QL I-16A2IAJ-13	22	3000/4000/6000	1300/1350/1400 1170/1215/1260	≥80 ≥90	120	300x300x36	NA



Light source test report:

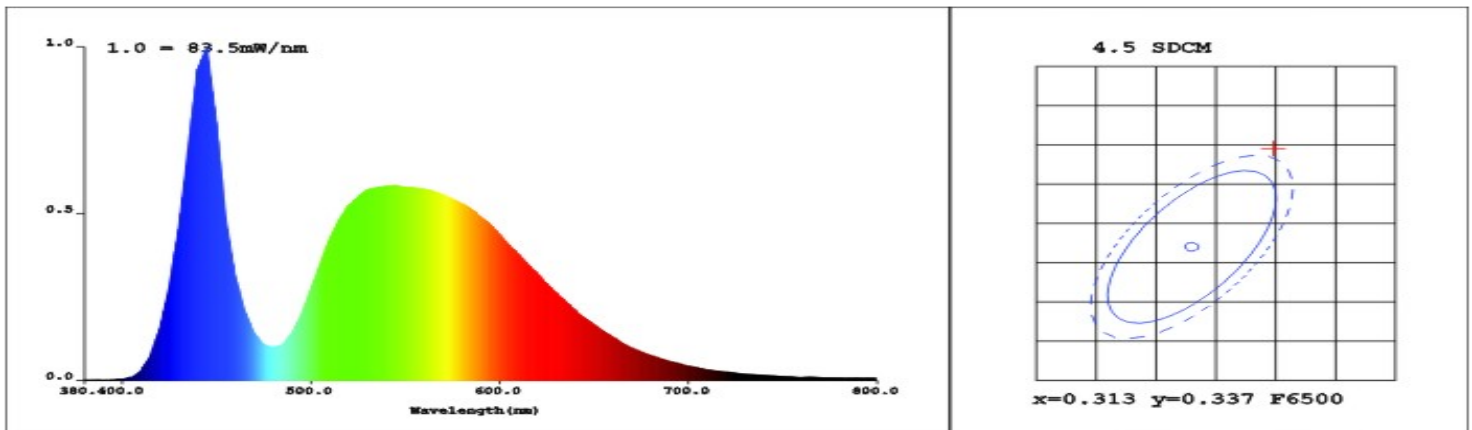

Feature:

SMD 2835 LED with high lumen output and high light efficiency (80lm/W)

Easy Installation, no RF, no flickering, environment friendly

Unique design, good appearance with spray white paint on shell

Power Supply: 110-240V AC



Application:

Home lighting Hotel



Hallway Shopping Mall

Rooms Office

Product code	Power (W)	CCT (K)	Luminous flux (lm)	CRI	Beam angle (°)	Dimension (mm)	Cut-out size (mm)
QL I-16A2IJF-13	28	3000/4000/6000	2160/2200/2240 1944/1980/2016	≥80 ≥90	120	400x400x40	NA
QL I-16A2IBJ-13	40	3000/4000/6000	3000/3100/3200 2700/2790/2880	≥80 ≥90	120	500x500x40	NA
QL I-16A2IBD-13	48	3000/4000/6000	3640/3740/3840 3276/3366/3456	≥80 ≥90	120	600x600x40	NA



Light source test report:

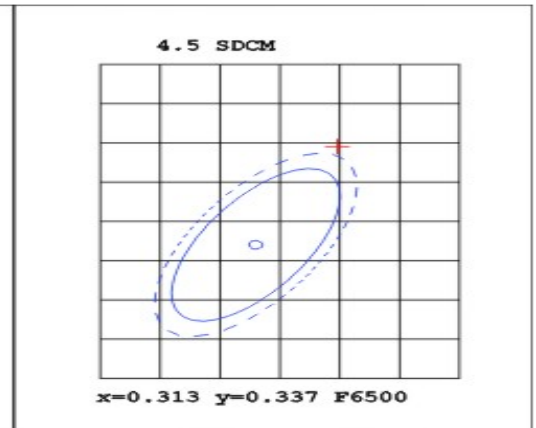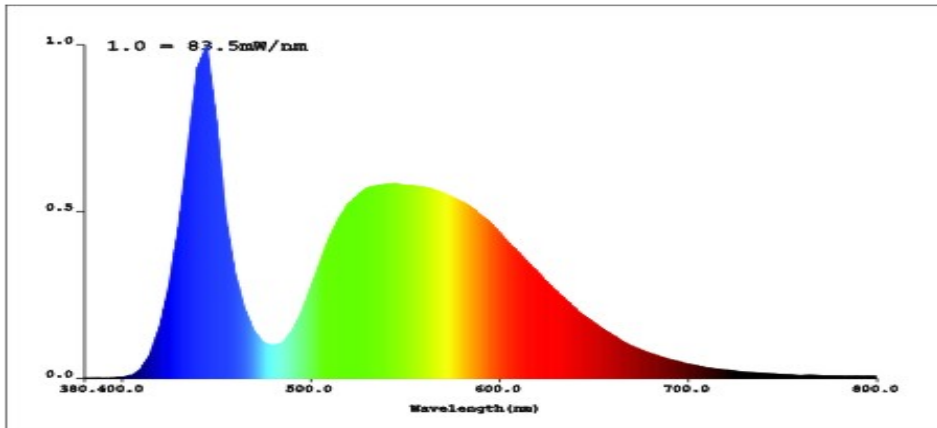

Feature:

SMD 2835 LED with high lumen output and high light efficiency (80lm/W)

Easy Installation, no RF, no flickering, environment friendly

Unique design, good appearance with spray white paint on shell

Power Supply: 110-240V AC



Application:

Home lighting Hotel


Hallway Shopping Mall

Rooms Office

Product code	Power (W)	CCT (K)	Luminous flux (lm)	CRI	Beam angle (°)	Dimension (mm)	Cut-out size (mm)
QL I-16A2HJD-13	9	3000/4000/6000	400/430/460 360/387/414	≥80 ≥90	120	Ø120x36	NA
QL I-16A2HJF-13	13	3000/4000/6000	640/700/720 576/630/648	≥80 ≥90	120	Ø170x36	NA
QL I-16A2HJH-13	17	3000/4000/6000	1000/1060/1100 900/945/990	≥80 ≥90	120	Ø225x36	NA
QL I-16A2HAJ-13	22	3000/4000/6000	1300/1350/1400 1170/1215/1260	≥80 ≥90	120	Ø300x36	NA



Light source test report:

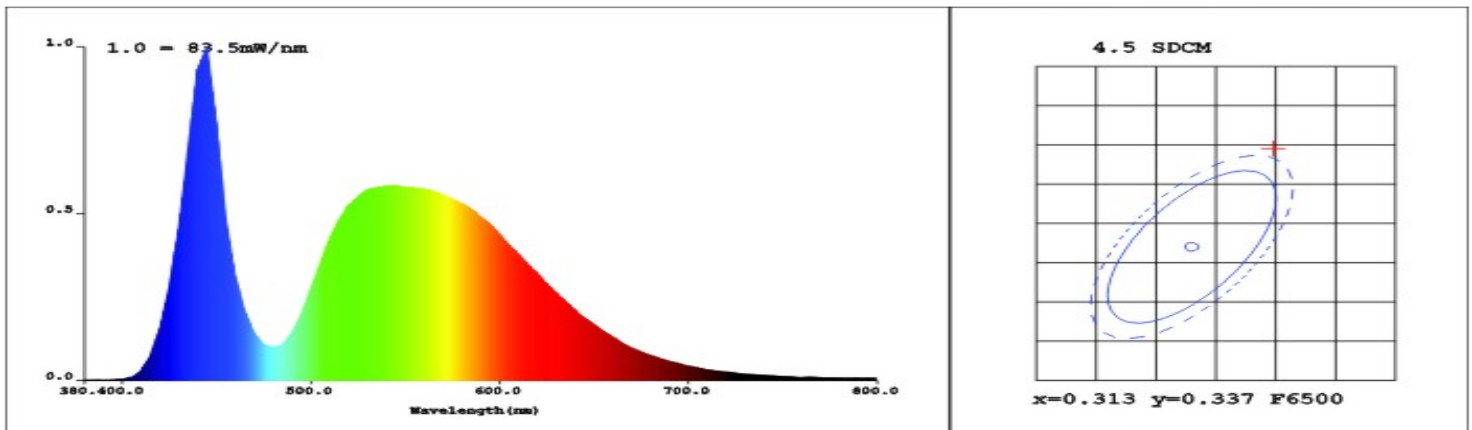

Feature:

SMD 2835 LED with high lumen output and high light efficiency (80lm/W)

Easy Installation, no RF, no flickering, environment friendly

Unique design, good appearance with spray white paint on shell

Power Supply: 110-240V AC



Application:

Home lighting Hotel


Hallway Shopping Mall

Rooms Office

Product code	Power (W)	CCT (K)	Luminous flux (lm)	CRI	Beam angle (°)	Dimension (mm)	Cut-out size (mm)
QL I-16A2HAF-13	28	3000/4000/6000	2160/2200/2240 1944/1980/2016	≥80 ≥90	120	∅400x40	NA
QL I-16A2HBJ-13	40	3000/4000/6000	3000/3100/3200 2700/2790/2880	≥80 ≥90	120	∅500x40	NA
QL I-16A2HBD-13	48	3000/4000/6000	3640/3740/3840 3276/3366/3456	≥80 ≥90	120	∅600x40	NA



Light source test report:

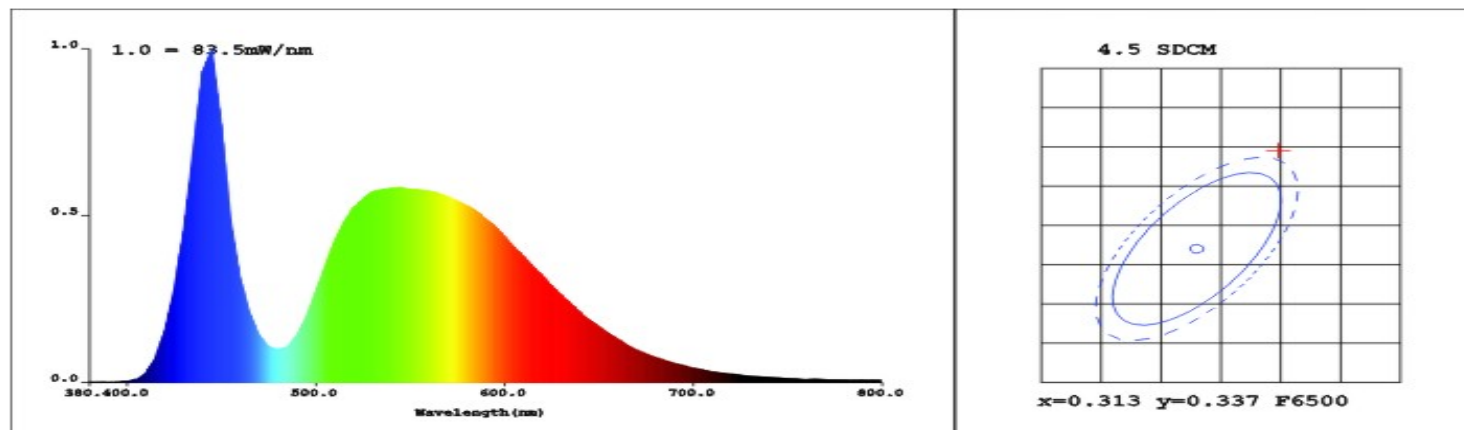

Feature:

SMD 2835 LED with high lumen output and high light efficiency (80-100lm/W)

PF>0.9, THD<10%, No flicker

Thin design, spray white paint on the shell, looks elegant

Power Supply: 110-240V AC



Application:

Home lighting Hotel



Hallway Shopping Mall

Rooms Office

Product code	Power (W)	CCT (K)	Luminous flux (lm)	CRI	Beam angle (°)	Dimension (mm)	Cut-out size (mm)
QL I-16A8CAA-5	20	3000/4000/6000	1400/1500/1600 1200/1300/1400	≥80 ≥90	Diffused beam	300x300x9.5	295x295
QL I-16A8CAD-5	36	3000/4000/6000	2800/2900/3000 2500/2600/2700	≥80 ≥90	Diffused beam	300x1200x9.5	595x1195
QL I-16A8CAE-5	36	3000/4000/6000	2800/2900/3000 2500/2600/2700	≥80 ≥90	Diffused beam	600x600x9.5	595x595



Light source test report:

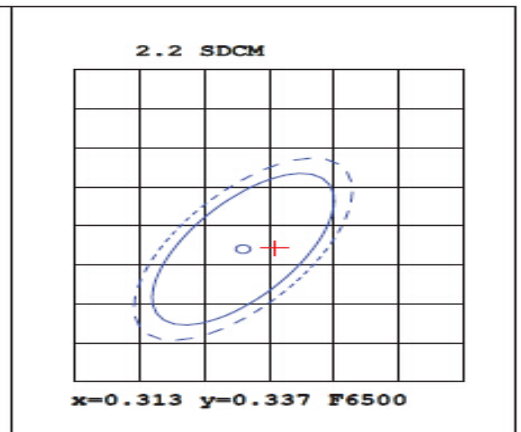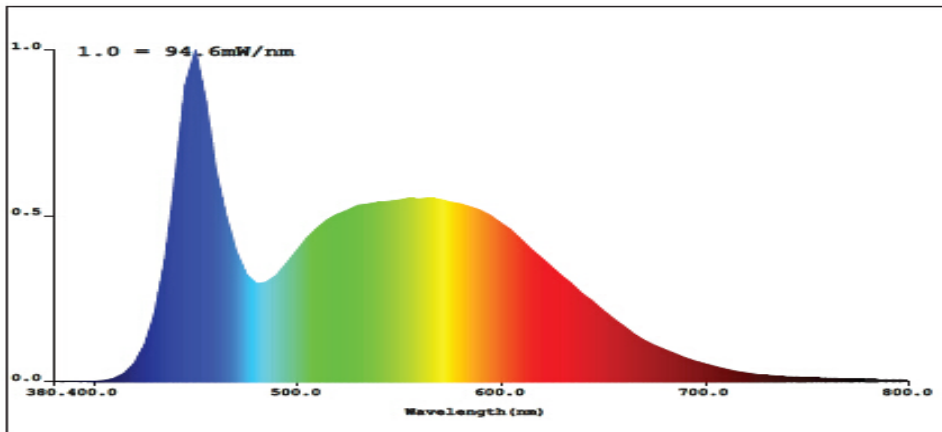

Feature:

SMD 2835 LED with high lumen output and high light efficiency (80-100lm/W)

PF>0.9, THD<10%, No flicker

Ultra-thin design, spray white paint on the shell, looks elegant

Power Supply: 110-240V AC



Application:

Home lighting Hotel

Hallway Shopping Mall

Rooms Office

Product code	Power (W)	CCT (K)	Luminous flux (lm)	CRI	Beam angle (°)	Dimension (mm)	Cut-out size (mm)
QL I-16A8CAA	20	3000/4000/6000	1400/1500/1600 1200/1300/1400	≥80 ≥90	Diffused beam	300x300x7.5	295x295
QL I-16A8CAD	40	3000/4000/6000	3000/3100/3200 2700/2800/2900	≥80 ≥90	Diffused beam	600x1200x7.5	595x1195
QL I-16A8CAE	40	3000/4000/6000	3000/3100/3200 2700/2800/2900	≥80 ≥90	Diffused beam	600x600x7.5	595x595
QL I-16A8CAF	72	3000/4000/6000	5500/5600/5700 5000/5100/5200	≥80 ≥90	Diffused beam	600x1200x7.5	595x1195