


INDOOR WALL LIGHTS




- Luminaire housing: Pure-aluminium
- Wall-mounted plate: Steel sheet
- Light source: COB LED with an optical lens
- Complete with LED driver

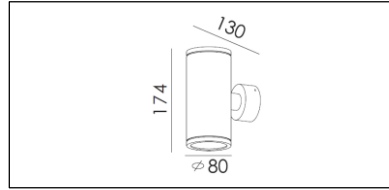


Powder-coated: **White Silver Black**
 Colour Temp.: **2700K 3000K 4000K**
 Beam Angle: **24° 36° 60°**

QL W-FJJA FRWL 2x5W 900lm 0.74kg
 With LED Driver 36V-250mA
 230V-50Hz


COB LED CRI≥80 IP44 CE RoHS



h(m)	D(m)	Em(lx)	Emax(lx)
1	0.6	353	1410
2	1.2	124	353
3	1.8	71	157
4	2.3	48	88



h(m)	D(m)	Em(lx)	Emax(lx)
1	0.6	250	1001
2	1.2	88	250
3	1.8	50	111
4	2.4	35	63




h(m)	D(m)	Em(lx)	Emax(lx)
1	1.2	95	378
2	2.4	33	95
3	3.6	19	42
4	4.9	13	24

INDOOR WALL LIGHTS




QL W-FJF FRWL 6W 500lm 0.46kg
With LED Driver 36V-140mA
230V-50Hz

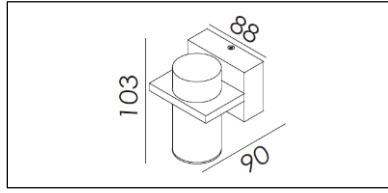


COB LED CRI≥80 IP44 CE RoHS

- Luminaire housing: Pure-aluminium
- Wall-mounted plate: Steel sheet
- Light source: COB LED with a high efficiency optical reflector
- Complete with LED driver


Powder-coated: **White Silver Black**
Colour Temp.: **2700K 3000K 4000K**
Beam Angle: **24° 36° 60°**



h(m)	D(m)	Em(lx)	Emax(lx)
1	0.6	353	24° 1410
2	1.2	124	353
3	1.8	71	157
4	2.3	48	88




h(m)	D(m)	Em(lx)	Emax(lx)
1	0.6	250	36° 1001
2	1.2	88	250
3	1.8	50	111
4	2.4	35	63



h(m)	D(m)	Em(lx)	Emax(lx)
1	1.2	95	60° 378
2	2.4	33	95
3	3.6	19	42
4	4.9	13	24




QL W-FJG FRWL 2x6W 900lm 0.53kg
With LED Driver 36V-250mA
230V-50Hz

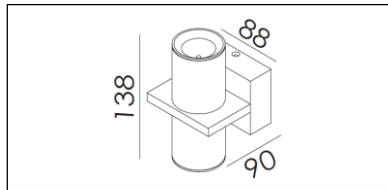


COB LED CRI≥80 IP44 CE RoHS

- Luminaire housing: Pure-aluminium
- Wall-mounted plate: Steel sheet
- Light source: COB LED with a high efficiency optical reflector
- Complete with LED driver


Powder-coated: **White Silver Black**
Colour Temp.: **2700K 3000K 4000K**
Beam Angle: **24° 36° 60°**



h(m)	D(m)	Em(lx)	Emax(lx)
1	0.6	353	24° 1410
2	1.2	124	353
3	1.8	71	157
4	2.3	48	88




h(m)	D(m)	Em(lx)	Emax(lx)
1	0.6	250	36° 1001
2	1.2	88	250
3	1.8	50	111
4	2.4	35	63



h(m)	D(m)	Em(lx)	Emax(lx)
1	1.2	95	60° 378
2	2.4	33	95
3	3.6	19	42
4	4.9	13	24

INDOOR WALL LIGHTS

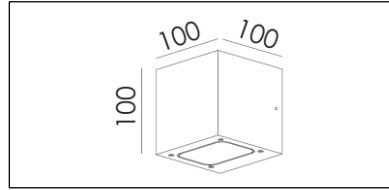


- Luminaire housing: Pure-aluminium
- Wall-mounted plate: Steel sheet
- Light source: COB LED with an optical lens
- Complete with LED driver




Powder-coated: **White Silver Black**
 Colour Temp.: **2700K 3000K 4000K**
 Beam Angle: **24° 36° 60°**

COB LED CRI≥80 IP44 CE RoHS


QL W-FAGA FSWL 2x5W 800lm 1.94kg
 With LED Driver 36V-250mA
 230V-50Hz



h(m)	D(m)	Em(lx)	Emax(lx)
1	1.0	137	548
2	2.0	48	137
3	3.0	27	61
4	3.9	19	34



h(m)	D(m)	Em(lx)	Emax(lx)
1	1.1	113	451
2	2.2	40	113
3	3.3	23	50
4	4.5	15	28




h(m)	D(m)	Em(lx)	Emax(lx)
1	1.5	79	317
2	3.0	28	79
3	4.4	16	35
4	5.9	11	20



INDOOR WALL LIGHTS




QL W-FJAF FSWL 5W 380lm 0.32kg
With LED Driver 9V-350mA
230V-50Hz

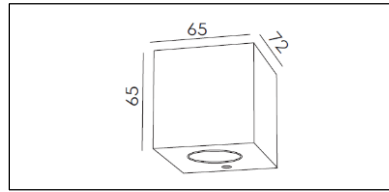


COB LED CRI≥80 IP20 CE RoHS

- Luminaire housing: Pure-aluminium
- Wall-mounted plate: Steel sheet
- Light source: COB LED with a high efficiency optical reflector
- Complete with LED driver


Powder-coated: **White Silver Black**
Colour Temp.: **2700K 3000K 4000K**
Beam Angle: **24° 36° 60°**



h(m)	D(m)	Em(lx)	Emax(lx)
1	0.6	353	1410
2	1.2	124	353
3	1.8	71	157
4	2.3	48	88




h(m)	D(m)	Em(lx)	Emax(lx)
1	0.6	250	1001
2	1.2	88	250
3	1.8	50	111
4	2.4	35	63



h(m)	D(m)	Em(lx)	Emax(lx)
1	1.2	95	378
2	2.4	33	95
3	3.6	19	42
4	4.9	13	24




QL W-FJAI FSWL 2x3W 450lm 0.38kg
With LED Driver 9V-500mA
230V-50Hz

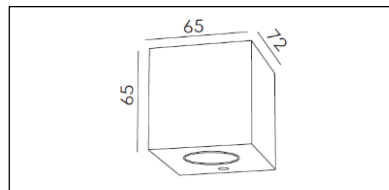


COB LED CRI≥80 IP20 CE RoHS

- Luminaire housing: Pure-aluminium
- Wall-mounted plate: Steel sheet
- Light source: COB LED with a high efficiency optical reflector
- Complete with LED driver


Powder-coated: **White Silver Black**
Colour Temp.: **2700K 3000K 4000K**
Beam Angle: **24° 36° 60°**



h(m)	D(m)	Em(lx)	Emax(lx)
1	0.6	353	1410
2	1.2	124	353
3	1.8	71	157
4	2.3	48	88




h(m)	D(m)	Em(lx)	Emax(lx)
1	0.6	250	1001
2	1.2	88	250
3	1.8	50	111
4	2.4	35	63



h(m)	D(m)	Em(lx)	Emax(lx)
1	1.2	95	378
2	2.4	33	95
3	3.6	19	42
4	4.9	13	24

RECESSED WALL LIGHTS

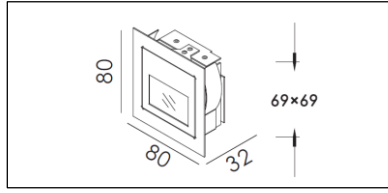

- Luminaire housing: Aluminium sheet
- Light source: High power LED
- Complete with LED driver





COB LED CRI≥80 IP20 CE RoHS

Powder-coated: **White Silver Black**
Colour Temp.: **2700K 3000K 4000K**

QL R-FJJG FSWL 1W 35lm 0.09kg
With LED Driver 3.5V-350mA
230V-50Hz

QL R-FJJH FSWL 3W 68lm 0.09kg
With LED Driver 3.5V-700mA
230V-50Hz

RECESSED WALL LIGHTS

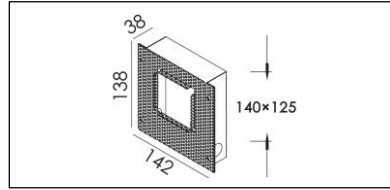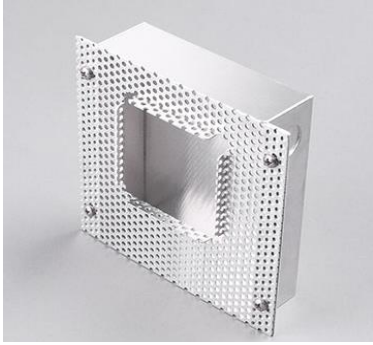

- Recessed kit in brickwork: Aluminum sheet

CE RoHS

QL EJEH FSWL

0.13kg

Accessories for model:

QL R-FJJG FSWL 1W

QL R-FJJH FSWL 3W

