



CEILING RECESSED WALL WASH LIGHTS



CEILING RECESSED WALL WASH LIGHTS

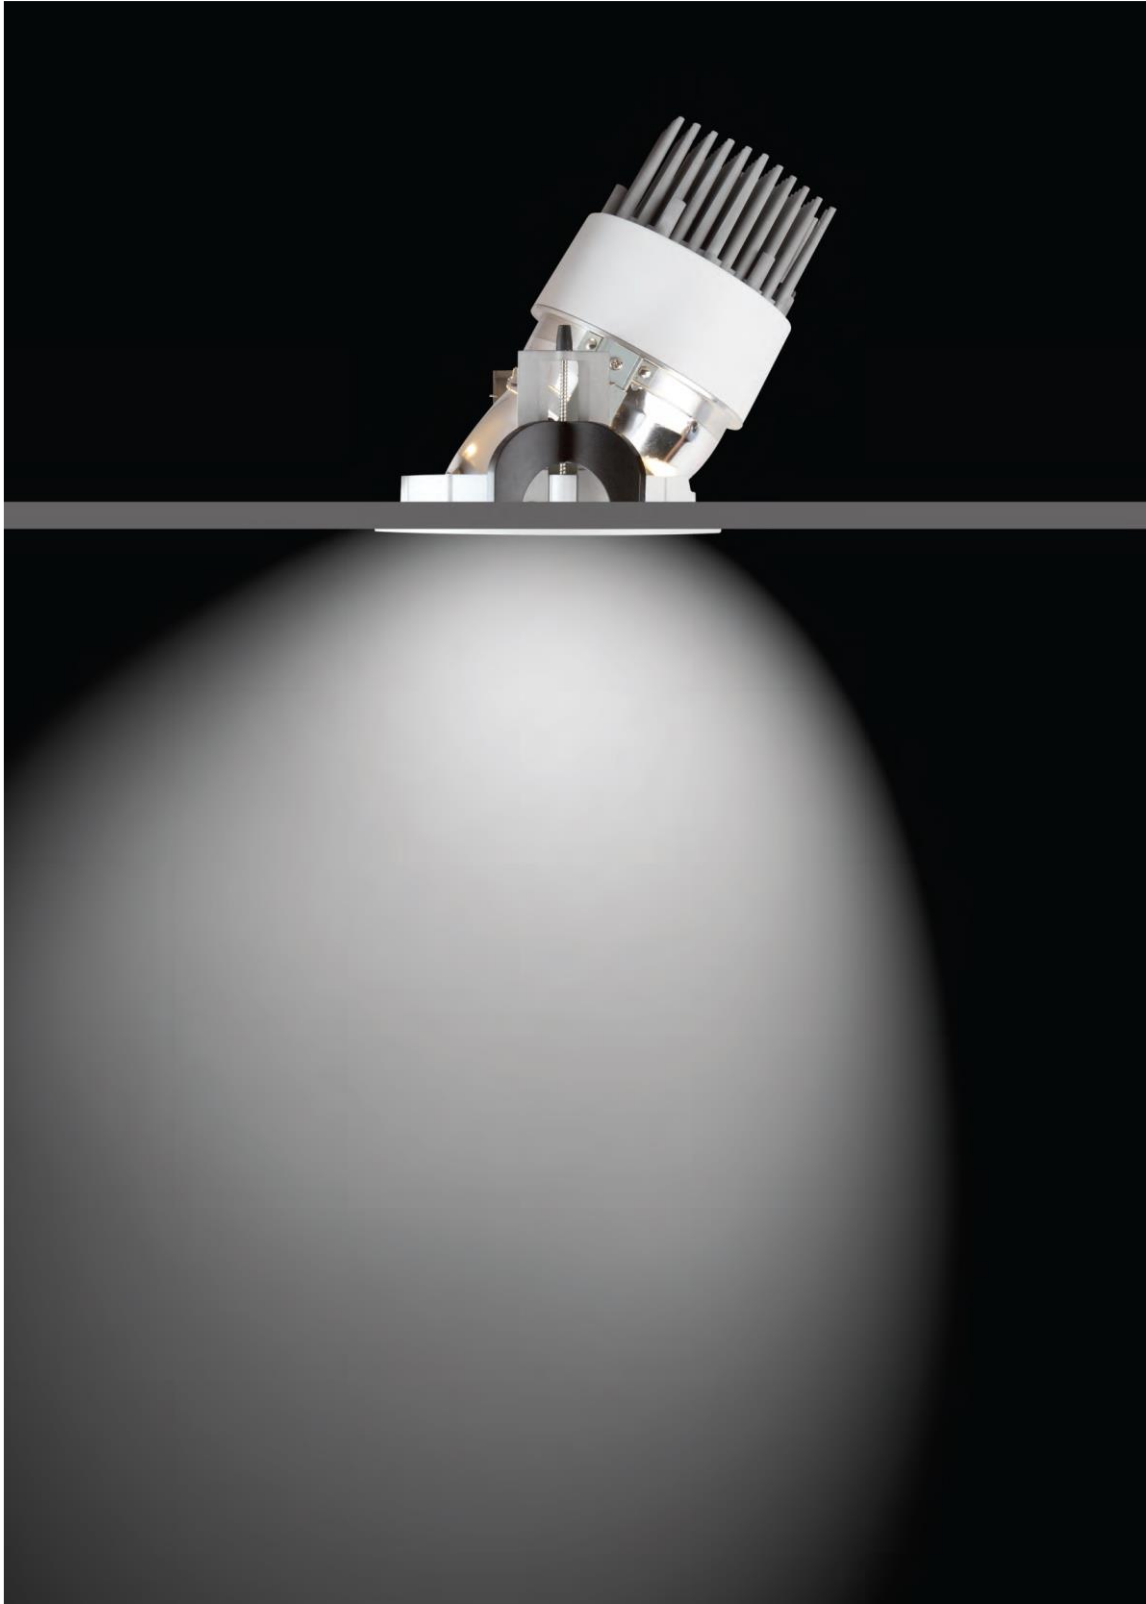

CEILING RECESSED WALL WASH LIGHTS

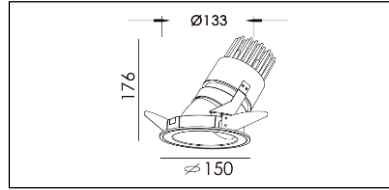

- Housing and mounting ring: Die-cast Aluminium
- Light source: COB LED with high efficiency optical reflector
- Dark-light reflector: Aluminum bright anodised



Powder-coated: **White Silver Black**
Colour Temp.: **2700K 3000K 4000K**

Driver gear: **Non-dimmable, Triac dimmable, 1-10V dimmable, DALI dimmable**

COB LED CRI≥80 IP44 CE RoHS

QL R-FJID FRWW 15W 1100lm 1.08kg
With LED Driver 36V-350mA
230V-50Hz

Mean illuminance E_n (lx)

Wall height (m)	4.0			
Offset from wall (m)	0.9	0.9	1.2	1.2
Luminaire spacing (m)	0.9	1.2	1.2	1.5
Illuminance E _n (lx)	265	233	175	157

QL R-FJID FRWW 20W 1600lm 1.08kg
With LED Driver 36V-500mA
230V-50Hz

Mean illuminance E_n (lx)


Wall height (m)	4.0			
Offset from wall (m)	0.9	0.9	1.2	1.2
Luminaire spacing (m)	0.9	1.2	1.2	1.5
Illuminance E _n (lx)	367	316	236	217

QL R-FJID FRWW 25W 1800lm 1.08kg
With LED Driver 36V-600mA
230V-50Hz

Mean illuminance E_n (lx)

Wall height (m)	4.0			
Offset from wall (m)	0.9	0.9	1.2	1.2
Luminaire spacing (m)	0.9	1.2	1.2	1.5
Illuminance E _n (lx)	411	354	264	242

CEILING RECESSED WALL WASH LIGHTS

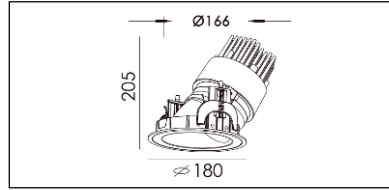

- Housing and mounting ring: Die-cast Aluminium
- Light source: COB LED with high efficiency optical reflector
- Dark-light reflector: Aluminum bright anodised



Powder-coated: **White Silver Black**
Colour Temp.: **2700K 3000K 4000K**

Driver gear: **Non-dimmable, Triac dimmable, 1-10V dimmable, DALI dimmable**

COB LED CRI≥80 IP44 CE RoHS

QL R-FCBA FRWW 20W 1300lm 1.55kg
With LED Driver 36V-500mA
230V-50Hz

Mean illuminance E_n (lx)				
Wall height (m)	4.0			
Offset from wall (m)	0.9	0.9	1.2	1.2
Luminaire spacing (m)	0.9	1.2	1.2	1.5
Illuminance E _n (lx)	317	272	203	186

QL R-FCBA FRWW 25W 1500lm 1.55kg
With LED Driver 36V-600mA
230V-50Hz

Mean illuminance E_n (lx)				
Wall height (m)	4.0			
Offset from wall (m)	0.9	0.9	1.2	1.2
Luminaire spacing (m)	0.9	1.2	1.2	1.5
Illuminance E _n (lx)	356	305	228	208

QL R-FCBA FRWW 30W 2100lm 1.55kg
With LED Driver 36V-800mA
230V-50Hz

Mean illuminance E_n (lx)				
Wall height (m)	4.0			
Offset from wall (m)	0.9	0.9	1.2	1.2
Luminaire spacing (m)	0.9	1.2	1.2	1.5
Illuminance E _n (lx)	503	432	322	295

QL R-FCBA FRWW 40W 2700lm 1.55kg
With LED Driver 36V-1050mA
230V-50Hz

Mean illuminance E_n (lx)				
Wall height (m)	4.0			
Offset from wall (m)	0.9	0.9	1.2	1.2
Luminaire spacing (m)	0.9	1.2	1.2	1.5
Illuminance E _n (lx)	638	547	409	374