

CEILING RECESSED DOWN LIGHTS

Technical Specifications:


- Product Code : QL R-FAHH FRDL*
- Body Material : Die-cast Aluminium with powder-coated
- Reflector : Aluminium bright anodized grit blasting finish to meet different requirements
- Reflector Color : Shining silver, Dark chrome, Champaign gold, Satin silver.
- Body Color : White, Silver, Black
- Fixed/Adjustable : Fixed
- Light Source : COB LED
- Beam Angle : 24°, 36°, 45°
- Color Temperature : 2700K, 3000K, 4000K
- CRI : ≥80
- UGR : <19
- Power Factor : 0.9
- Ingress Protection : IP20
- Driver : Constant Current
- Input Voltage : 220-240V/50-60Hz
- Dimming Options : Triac, 0-10V, DALI
- Mounting Arrangement: Spring clamp
- Life Time : 50000hrs
- Weight : 0.40Kg




Product Code (*)	Wattage (W)	Lumen Output (lm)	Operating Current (mA)	Overall Diameter (mm)	Overall Height (mm)	Cutout Dimension (mm)
QL R-FAHH FRDL 10W	10	3000K-560 4000K-600	250	115	98	102
QL R-FAHH FRDL 15W	15	3000K-730 4000K-790	350	115	98	102

Photometric Distribution Curve:


QL R-FAHH FRDL 10W:






h(m)	D(m)	Em(lx)	Emax(lx)
			24°
1	0.5	645	2582
2	0.9	226	645
3	1.4	129	287
4	1.9	89	161



h(m)	D(m)	Em(lx)	Emax(lx)
			36°
1	0.6	490	1963
2	1.2	123	490
3	1.8	98	218
4	2.4	68	123

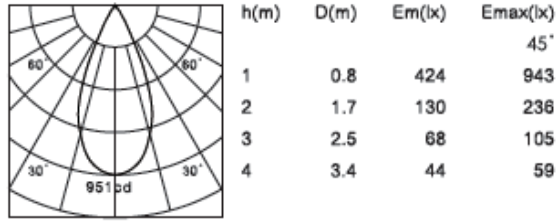

QL R-FAHH FRDL 15W:

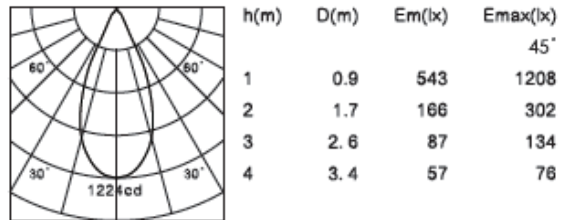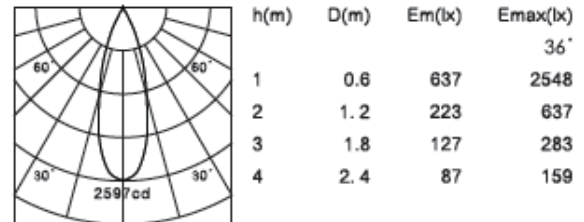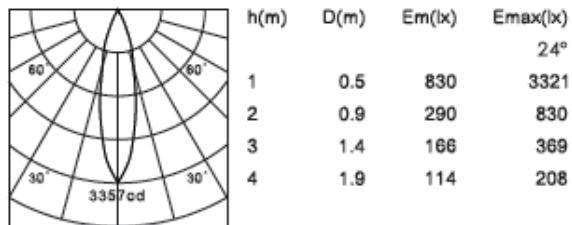

Disclaimer: Our R&D team works towards continuous improvement in product design and features. Please check with us for the latest information pertaining to this product.