

**CEILING RECESSED DOWN LIGHTS**

**Technical Specifications:**


Product Code	: QL R-FBAF FRDL*
Body Material	: Die-cast Aluminium with powder-coated
Reflector	: High efficiency optical reflector
Anti-dazzle ring	: Aluminium black
Body Color	: White, Silver, Black
Fixed/Adjustable	: Fixed
Light Source	: COB LED with optical lens
Beam Angle	: 45°
Color Temperature	: 2700K, 3000K, 4000K
CRI	: ≥80
UGR	: <19
Power Factor	: 0.9
Ingress Protection	: IP20
Driver	: Constant Current
Input Voltage	: 220-240V/50-60Hz
Dimming Options	: Triac, 0-10V, DALI
Mounting Arrangement:	Spring clamp
Life Time	: 50000hrs
Weight	: 0.33Kg




Product Code (*)	Wattage (W)	Lumen Output (lm)	Operating Current (mA)	Overall Diameter (mm)	Overall Height (mm)	Cutout Dimension (mm)
QL R-FBAF FRDL 6W	6	3000K-570 4000K-590	140	90	90	83
QL R-FBAF FRDL 10W	10	3000K-880 4000K-920	250	90	90	83
QL R-FBAF FRDL 15W	15	3000K-1220 4000K-1280	350	90	90	83

**Photometric Distribution Curve:**


**QL R-FBAF FRDL 6W:**

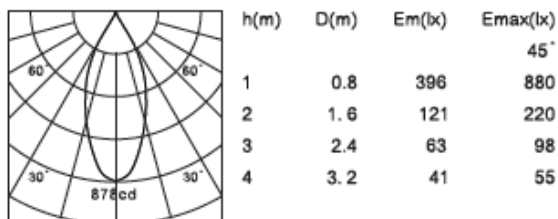

QL R-FBAF FRDL 10W:

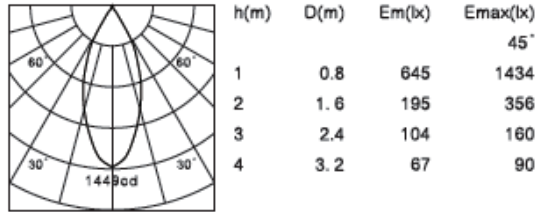

QL R-FBAF FRDL 15W:

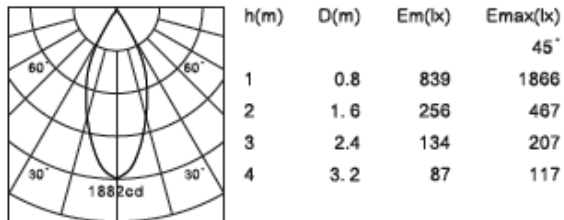

*Disclaimer: Our R&D team works towards continuous improvement in product design and features. Please check with us for the latest information pertaining to this product.*