



QL K 4A1BA1EAG

Recessed
LD Stair Light and Wall Light

LED Colour Temperature



- 3000K
- 4000K
- 6000K

Optics

- N/A



Outer Dimensions Unit:mm



Mounting Sleeve 074#

Material Specifications

Housing	12# Die-casting aluminum T=60-80μm. Adhesion of ISO class1/ ASTM class 4B high temperature painting
Light Source	SMD3030 Type LED
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~50°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
Mounting sleeve	ABS 074#
Dimmable Support	Triac PWM 1-10V Dali

FRONT COVER COLOR

Basic



Sanded Dark Grey
KAP 7037

Secondary




Silver Grey
KAP 9022



Sanded Black
RAL9005

MOUNTING SLEEVE CHARACTERISTIC



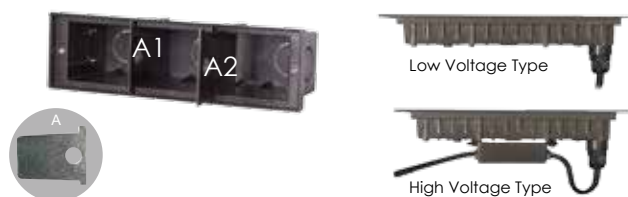


- The above picture – the supporting plate "A1" and "A2" are used for preventing deformation of the sleeve during the construction installation process.
- Please remove both the supporting plates from the sleeve before installing

TECHNICAL DATA

ITEM	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
4A1BA1EAG	15×SMD3030	24V DC 120/240	24V = 200 120V = 90 240V = 52	24V = 4.8 120V = 6.4 240V = 6.5	Cool White = 99 Warm White = 92	10

PHOTOMETRIC CURVES

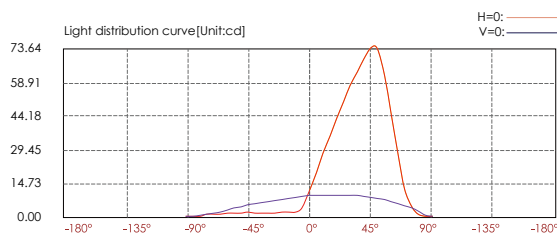

Distance (m)	Center beam LUX	Beam width (V x H)
2m	3.28 LUX	4.30m x 1.70m
4m	0.82 LUX	8.60m x 3.40m
6m	0.36 LUX	12.9m x 5.10m
8m	0.20 LUX	17.2m x 6.90m
10m	0.13 LUX	21.4m x 8.60m
12m	0.09 LUX	25.7m x 10.3m