

Single Side



Wall Mounting Landscape Light


QL K- 18A7AF0ABF

LED Colour Temperature


- 2700K
- 3000K
- 6000K

Optics

	R5
	R0118C044XL 18°
	R0125C044XL 25°
	R0134C044XL 34°



Outer Dimensions

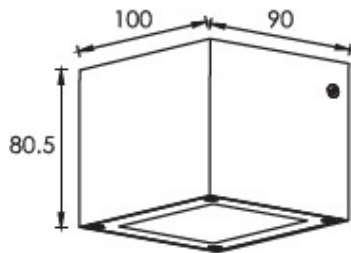




Material Specifications

Housing	12# Die-casting dark grey powder coated aluminum. T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
Light Window	PC T=6mm
Gasket	Tooling shaped seal
Driver	Main voltage 100V-240V driver inside builded
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2×1.0mm ² L=0.3m(low voltage) H05RN-F 3×1.0mm ² L=0.3m(high voltage)

Housing Colour Option



Item	Light Source	The manufacturer selected lens degree(°)θ1/2	Input Voltage(V)	Typical Operating Current(mA)	Typical consumption(W)	Typical Luminance(lm)	IK rate
18A7AF0ABF	1X6 W COB	34°	24V DC 120/240	24V =270 120V =65 240V =37	24V =6.5 120V =7.7 240V =7.8	510 lm	06

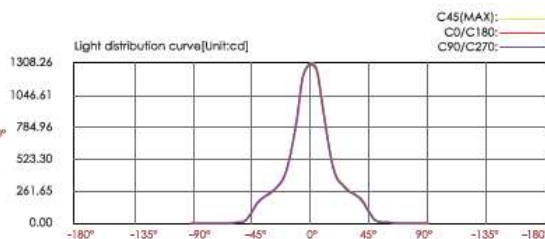

Center beam LUX	Beam width V	H
2m 324.84 LUX	1.0m	1.0m
4m 81.21 LUX	1.9m	1.9m
6m 36.09 LUX	2.9m	2.9m
8m 20.30 LUX	3.8m	3.8m
10m 12.99 LUX	4.8m	4.8m
12m 9.02 LUX	5.8m	5.7m

Ver.Spread:27.0 Horiz.Spread:26.9