




Symmetrical power LED diffused inground light


QLK-2A2WDR0FEG-A

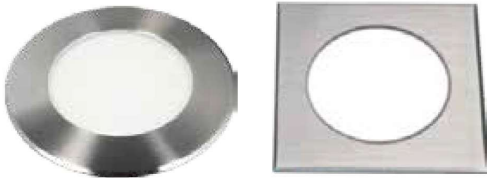

■ LED Colour Temperature
 ■ Optics

- 3000K
- 4000K
- 6500K

Outer Dimensions Unit:mm






Material Specifications

Housing	12# Die-casting grey powder coated aluminum. T=60-80µm Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chromeplated Stainless steel SUS 316L#
Light Window	Tempered frosted step glass.T=5mm
LED	OSRAM
Glass pressure capacity	Full area=254kgs
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m(low voltage)
Mounting sleeve	ABS 033#
Dimmable Support	Triac PWM 1-10V Dali



Item	Light Source	Input Voltage(V)	Typical Operating Current(mA)	Typical consumption(W)	Typical Luminance(lm)
2A2WDR0FEG-A	2 W	24V DC 240V	85	2.8	Cool white: 60 Warm white: 55

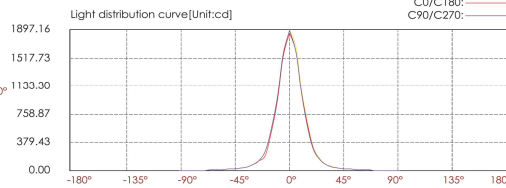

Lux distance cure

Illuminance at a distance
Center beam LUX

Beam width V	Beam width H
2m 463.79 LUX	0.7m 0.7m
4m 115.95 LUX	1.5m 1.5m
6m 51.53 LUX	2.2m 2.2m
8m 28.99 LUX	3.0m 3.0m
10m 18.55 LUX	3.7m 3.7m
12m 12.88 LUX	4.5m 4.4m

Ver.Spread:21.2 Horiz.Spread:20.9