

## LED Spot Light

### QL LDC005D NM




#### 5W High power LED

High performance, ceiling recessed, 3 hour SelfTest emergency lighting luminaire for 1 x 5W LED with open area/spot optic. Housing manufactured from die-cast aluminium, powder coated white. Class II electrical, ingress protection rated IP20 (IP40 from below). Electrical connection via 2 x 5 x 2.5mm<sup>2</sup> piano key terminals. . Suitable for mounting heights up to 7m. Can be operated in either maintained or non-maintained modes. Ceiling cutout Ø57mm. Complete with Self Testing Facility. Battery-4.8V 4500mAh NiCd. IP 54 optional(Use suffix IP).


Total power: 5.32 W  
 Dimensions: Ø65 x 28 mm  
 Weight: 0.75 kg



Escape Route/Corridor Optic

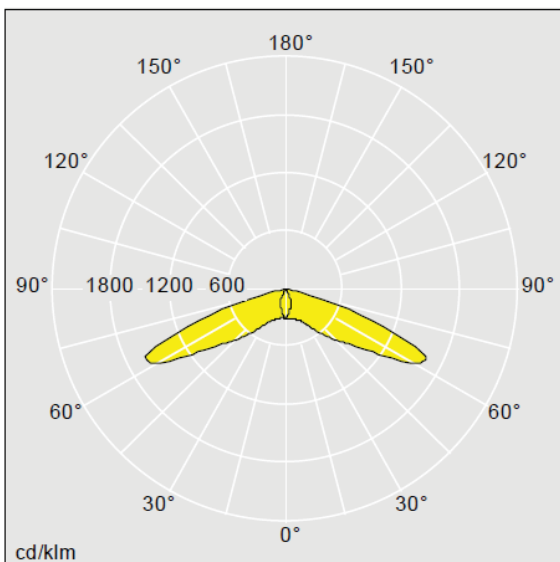

Open Area Optic

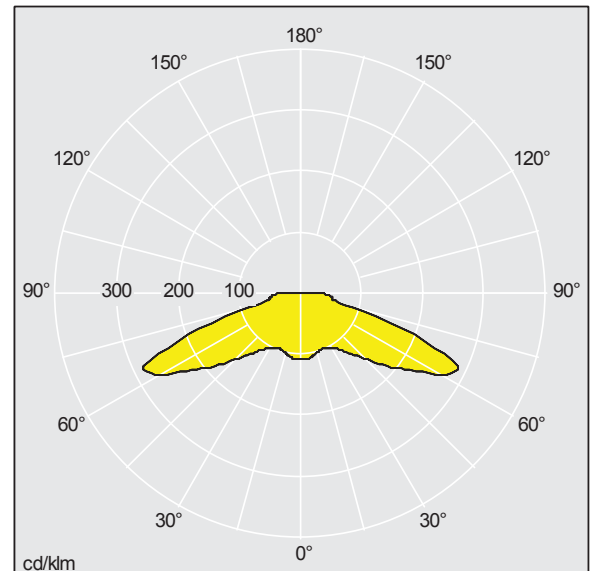

Lamp position: EM - emergency operation  
 Light Source: LED  
 Luminaire luminous flux\*: 285 lm  
 LOR: 0,90 ULOR: 0,01 DLOR: 0,89

Total emergency luminous flux: 300 lm  
 Luminaire efficacy\*: 53.6 lm/W  
 Ballast: 1x EM ST EM power1 E3TX LED