

## LED Spot Light

### QL LDC005D NM




#### 5W High power LED

High performance, ceiling recessed, 3 hour SelfTest emergency lighting luminaire for 1 x 5W LED with open area/spot optic. Housing manufactured from die-cast aluminium, powder coated white. Class II electrical, ingress protection rated IP20 (IP40 from below). Suitable for non-maintained mode operation. Ceiling cutout Ø51.2 mm. Complete with Self Testing Facility. Battery-LiFePO4 3.2V 6000mAh. IP 54 optional(Use suffix IP).

Total Running power: 5W  
Running current: 320-580mA  
Charging current: 308-414mA  
Discharging current: 220-1400mA  
Conversion voltage: 145-180VAC  
Source lumens(DC): 400lm




Escape Route/Corridor Optic

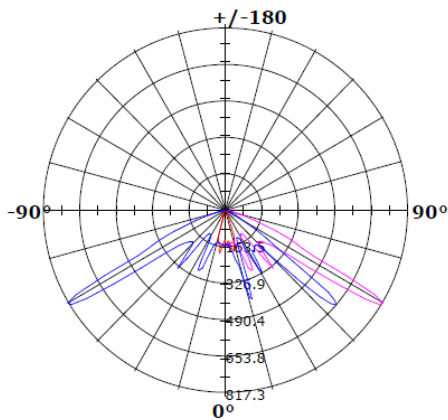

Light Distribution Curve [Unit: cd]

Open Area Optic

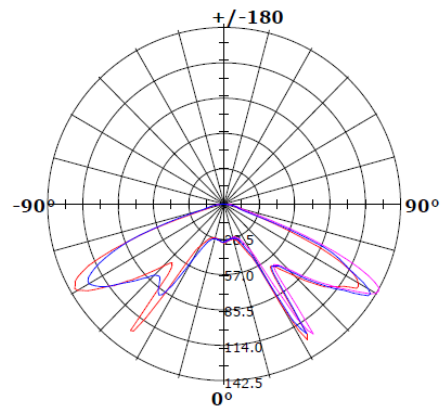

Light Distribution Curve [Unit: cd]

#### Dimensional drawing:

