

FLEXIBLE RED-WHITE LED STRIP




SMD
5050

Product Features:


- Thick copper double sided PCB
- Geniue 3M adhesive on back side.
- SMD 5050 LED chip with 1mRED-1mWHITE alternate light colors.
- Easy to cut in 62.5mm segment.
- Ingress protection IP20/IP65/IP67/IP68.
- Working Temperature -20°C to +50°C.
- Standard PCB width 10mm/12mm
- Working hour upto 50,000 hours.
- RGB/RGBW version also available

Product Code (*)	Watt per meter (W)	No of LED per meter	Constant Voltage	CCT	Beam Angle (deg)
QL DLS 23W R-W	23	96	24V	Red+White	120

Structure & Parameter

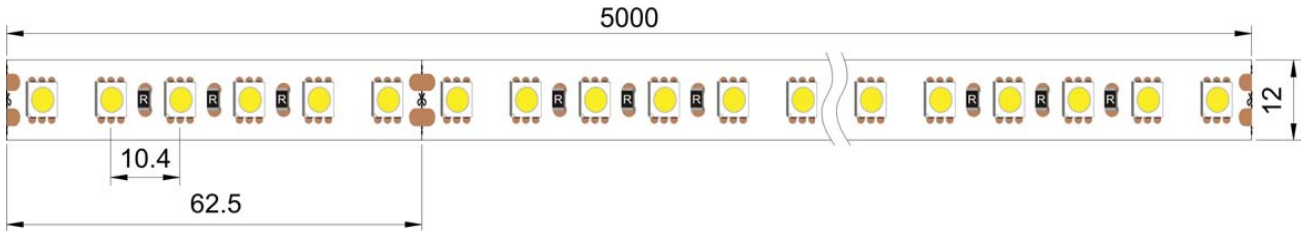


5050 96led 12mm 24V




Light Distribution Curve [Unit: cd]

Light Distribution Curve [Unit: cd]

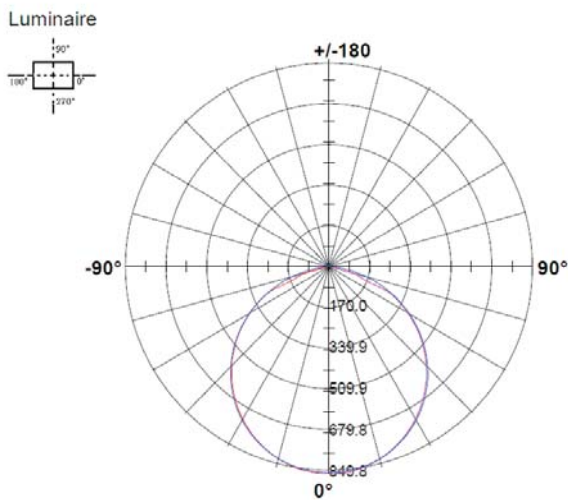

Lux-Distance Curve

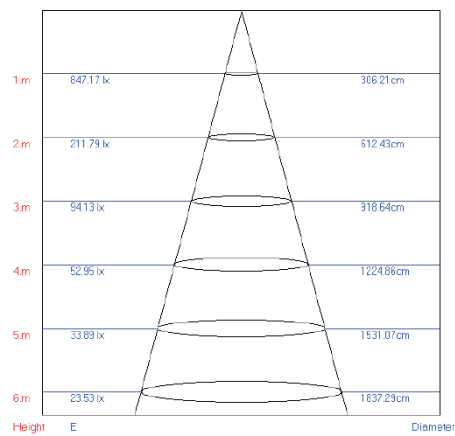

Beam Angle: 113.70°

Installation Diagram

