



Surface mount Light


QL-SFDL10

QL-SFUDL20

LED Colour Temperature

- 2700K
- 3000K
- 4000K
- 6500K

Outer Dimensions Unit:mm

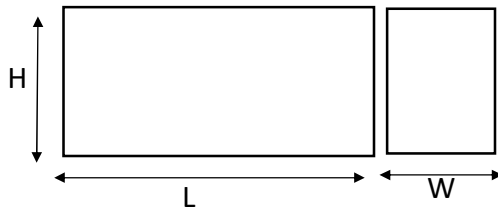

Material Specifications

Housing	12# Die-casting powder coated aluminum T=60-80μm, Adhesion of ISO class 1/ASTM class 4B
Front Cover	Tempered glass
LED	Osram/nichia
Gasket	Silicon Rubber Seal
Operating Temperature	-15°C ~ +50°C
CRI	≥85
Power Factor	0.95
Efficacy	70-85lm/w
Dimming Type	DALI,1-10V,On/Off

Model No.	Light Size(mm)
QL-SFDL10	L140*W90*H65
QL-SFUDL20	L220*W103*H103

Basic color selection:

Powder painting PANTONE 432u	Powder painting RAL9005	Powder painting RAL9006

Item	Light Source	Input Voltage(V)	Typical Operating Current(mA)	Beam angle(°)	Lumen(lm)
QL-SFDL10	10W	240	41.6	30°	Cool white=910 Warm white=850
QL-SFUDL20	2X10W	240	83.3	30°	Cool white=2X850 Warm white=2X800