



MODULAR LINEAR LED LIGHTS



Direct Beam




Indirect Beam

Technical Specifications:

Product Code	: QL DLS SL 78102 xxW
Body Material	: Extruded Aluminium
Diffuser	: PMMA Opal(OD), Prismatic(PD) for UGR<19
Body Color	: White, Silver, Black
Fixed/Adjustable	: Fixed
Light Source	: SMD 2835
Light Distribution	: Direct and Indirect**
Beam Angle	: 101°(opal), 90°(prismatic)
Color Temperature	: 3000K, 4000K, 5700K
CRI	: ≥80
Power Factor	: >0.9
Ingress Protection	: IP20
Driver	: Constant Current
Input Voltage	: 200-240V/50-60Hz
Dimming Options	: 0-10V, DALI
Mounting Arrangement	: Surface, Suspended, Recessed (trimless), Wall
Life Time	: 50000hrs (Available with higher lifetime on request)
Emergency kit	: Available with 3 hours back-up

***For indirect light distribution, please replace suffix D with I in diffuser*


Installation Options:

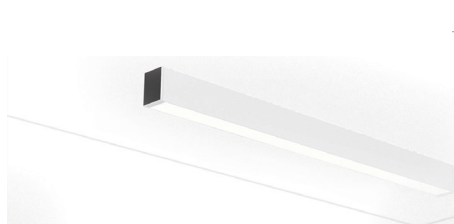

Surface mounted




Suspended

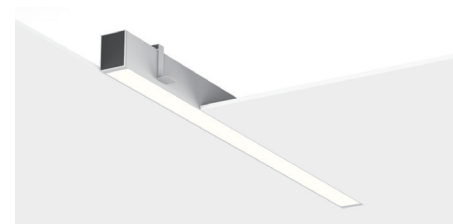

Recessed Trimless

Product Code	Power	Lumen Output	Overall Dimensions (mm)
QL DLS SL 78102 OD	15W	1385 Lm	L575*W78*H102
QL DLS SL 78102 OD	22W	2030 Lm	L855*W78*H102
QL DLS SL 78102 OD	30W	2733 Lm	L1135*W78*H102
QL DLS SL 78102 OD	38W	3507 Lm	L1415*W78*H102
QL DLS SL 78102 OD	45W	4154 Lm	L1695*W78*H102
QL DLS SL 78102 OD	52W	4800 Lm	L1975*W78*H102
QL DLS SL 78102 OD	60W	5538 Lm	L2255*W78*H102
QL DLS SL 78102 PD	15W	1126 Lm	L575*W78*H102
QL DLS SL 78102 PD	22W	1652 Lm	L855*W78*H102
QL DLS SL 78102 PD	30W	2217 Lm	L1135*W78*H102
QL DLS SL 78102 PD	38W	2854 Lm	L1415*W78*H102
QL DLS SL 78102 PD	45W	3380 Lm	L1695*W78*H102
QL DLS SL 78102 PD	52W	3905 Lm	L1975*W78*H102
QL DLS SL 78102 PD	60W	4506 Lm	L2255*W78*H102

Dimensional drawing:

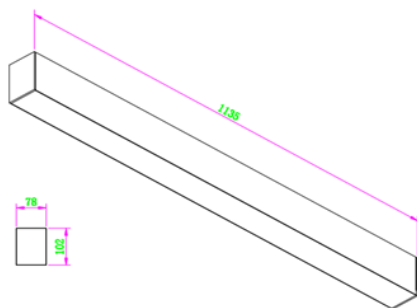

QL DLS SL 78102 30W

Accessories:

Profile >	Direct	Indirect	Light source plate	Prismatic diffuser for down light	Transparent diffuser for up light
Connection >	+ Connect	T Connect	L Connect	Connector A	Connector B
Installation Accessories >	Recessed Type 1	Recessed Type 2	Ceiling cap	Suspension wire	Suspension bracket