

# QL-CPM110

## Moderna Series Push Button Control Plate


The QL-CPM110 is a moderna series push button control plate. It is available in a wide range of finishes and models. It is an elegant user interface for control of lights ,curtains ,AC ,Geyser etc by the user.

The QL-CPM110 sits on the QL NET bus takes power from the bus and gives commands to the actuator or controller depending on the system architecture.

The QL CPM110 is available in a screw less clip-on construction with white and black finishes. It is a flush mounting plate which fits into a standard single gang 3" X 3" back box with fixing centres at 60.3mm.

The control plate is available with an in-built IR sensor for control by Qlite IR remote control. It operates in QL NET mode or NE100 mode depending on the system architecture. It can control a single zone or multiple zones at once, settable via DIP switch on the control plate.

All buttons are configurable in "Key Configurator" in " Web Lighting" by setting an unique dip switch code

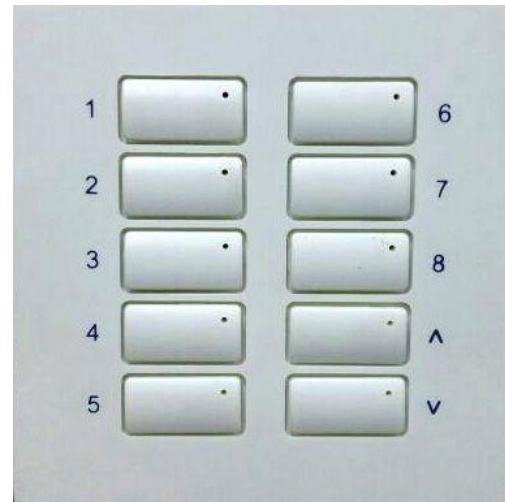

- Available in a variety of finishes
- Does not require a non-standard back box
- Operates in QL NET mode and NE 100 mode
- Operates in Single Zone or Multi Zone mode.
- Key lock / unlock function available
- Built-in Infrared receiver for control via Qlite IR remote control
- Finish and engraving customizable for special projects

# QL-CPM110

## Moderna Series Push Button Control Plate

### Specifications

Power Supply

12 V DC

Power requirement

50 mA

Protocol

QL-NET

Connectors:

QL NET: Inbuilt 4 pin 1.5mm connector  
Programming Port: 2.54mm 8 pin bar connector

Zone Setting Buttons:

10 button DIP switch

LED Indicators:

Blue LED per button to indicate active state

Environment:

Ambient Temperature: 0°C to 50°C  
Relative Humidity: less than 80%

Safety Regulatory Compliance :



Dimensions :

86mm (W) x 86mm (H) x 35mm (D)

Weight :

104 gm