

**CEILING RECESSED DOWN LIGHTS**

**Technical Specifications:**


- Product Code : QL R-FACF FRDL\*
- Body Material : Die-cast Aluminium with powder-coated
- Reflector : Aluminium bright anodized grit blasting finish to meet different requirements
- Reflector Color : Shining silver, Dark chrome, Champaign gold, Satin silver.
- Body Color : White, Silver, Black
- Fixed/Adjustable : Fixed
- Light Source : COB LED
- Beam Angle : 24°, 36°, 45°
- Color Temperature : 2700K, 3000K, 4000K
- CRI : ≥80
- UGR : <19
- Power Factor : 0.9
- Ingress Protection : IP20
- Driver : Constant Current
- Input Voltage : 220-240V/50-60Hz
- Dimming Options : Triac, 0-10V, DALI
- Mounting Arrangement: Spring clamp
- Life Time : 50000hrs
- Weight : 0.33Kg




Product Code (*)	Wattage (W)	Lumen Output (lm)	Operating Current (mA)	Overall Diameter (mm)	Overall Height (mm)	Cutout Dimension (mm)
QL R-FACF FRDL 6W	6	3000K-410 4000K-430	140	115	78	102
QL R-FACF FRDL 10W	10	3000K-560 4000K-600	250	115	78	102




**Photometric Distribution Curve:**

QL R-FACF FRDL 6W:

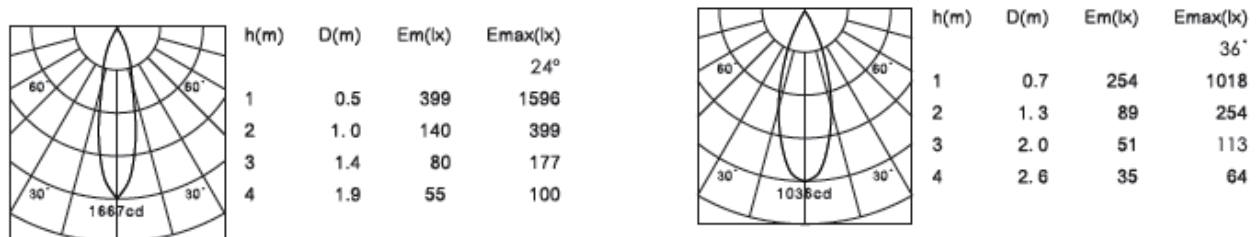

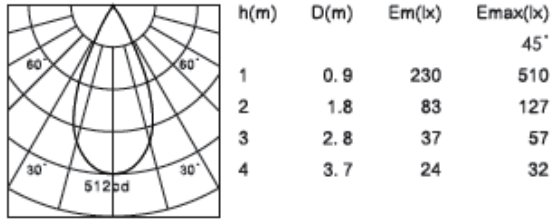

**QL R-FACF FRDL 10W:**

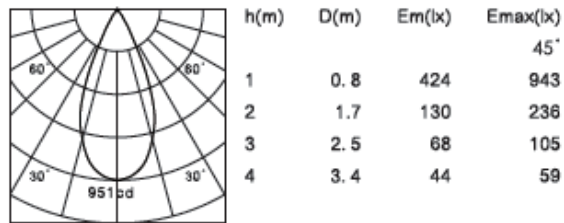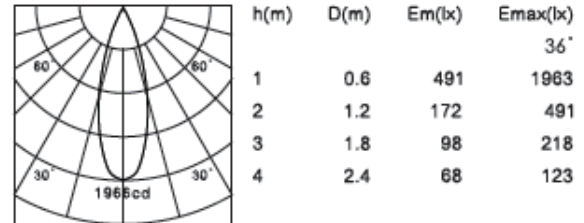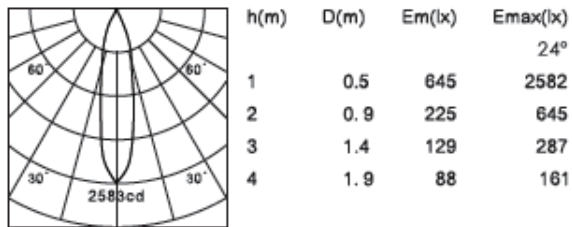

*Disclaimer: Our R&D team works towards continuous improvement in product design and features. Please check with us for the latest information pertaining to this product.*